

### Ampere's Law - Applications

Consider the situation shown schematically in the diagram. Currents  $I_1, I_2, I_3, I_4, I_5$  are flowing out of ( $\cdot$ ) or (+) into the paper. The corresponding  $\vec{B}$ -fields swirl around their sources as shown.


The main point is that the  $\vec{B}$ -field lines circulate around the currents. Choose a closed loop ( $L$ ).

Start at  $A$ , measure  $B$ , choose small step  $\Delta l$  along loop. Calculate Dot product (component of

$\vec{B}$  along  $\Delta l$  multiplied by  $\Delta l$ )

$$\vec{B} \cdot \Delta \vec{l} = B \Delta l \cos(\angle \vec{B}, \Delta \vec{l}).$$

$$\text{If } \vec{B} \perp \Delta \vec{l}, \vec{B} \cdot \Delta \vec{l} = 0.$$

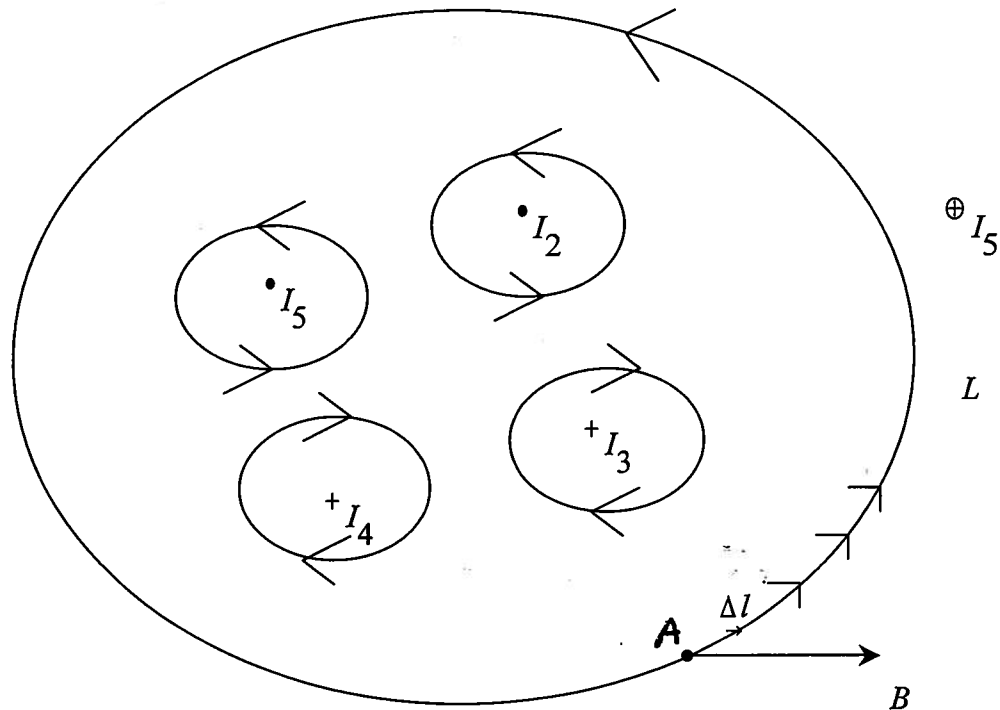

Repeat this calculation at every step as shown.  $\vec{B} \cdot \Delta \vec{l}$

Write out the sum

$$\sum_c \vec{B} \cdot \Delta \vec{l};$$

$c$ : closed loop.


This sum is called circulation of  $\vec{B}$  around closed loop and Ampere says that it is determined solely by currents threading through the surface on which the loop is drawn & only currents within the loop contribute, i.e. exclude  $I_5$ . The mathematical Equation is:

$$\sum_c \vec{B} \cdot \Delta \vec{l} = \mu_0 \sum I_i, \mu_0 = 4\pi \times 10^{-7} \frac{T \cdot m}{A}$$

In words, circulation of  $\vec{B}$  around closed loop is proportional to the algebraic sum of the currents threading the ~~the~~ surface on which the loop is drawn.

Note: As in case of Gauss' Law, Ampere's law gives circulation but not  $\vec{B}$ . To get  $\vec{B}$  you need high symmetry.  
Applications

### 1.) SINGLE CURRENT

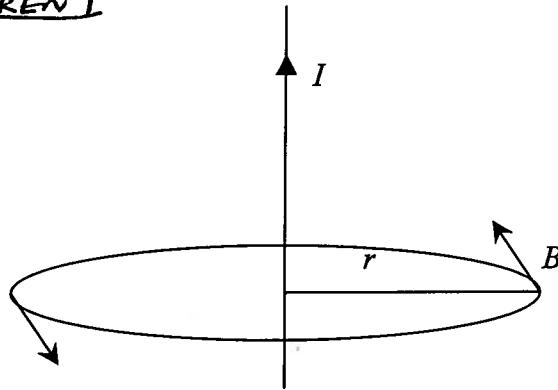

Single wire with current  $I$ , there is cylindrical symmetry so  $B$  can be a function of  $r$  only & must encircle  $I$ . [ $\vec{B}$  and  $d\vec{l}$  are parallel to one another]

Appropriate loop is circle of radius  $r$  centered on the wire


$$B \cdot 2\pi r = \mu_0 I$$

$$\text{so, } \vec{B} = \frac{\mu_0 I}{2\pi r} \hat{\phi}$$

as claimed previously

2.) Next, we begin by showing that if current is outside the loop it contributes nothing to the circulation. Choose  $L M N O P Q$  with  $I$  at the center of the circles of radii  $r_1$ , and  $r_2$

$I$  is  
out of  
paper.

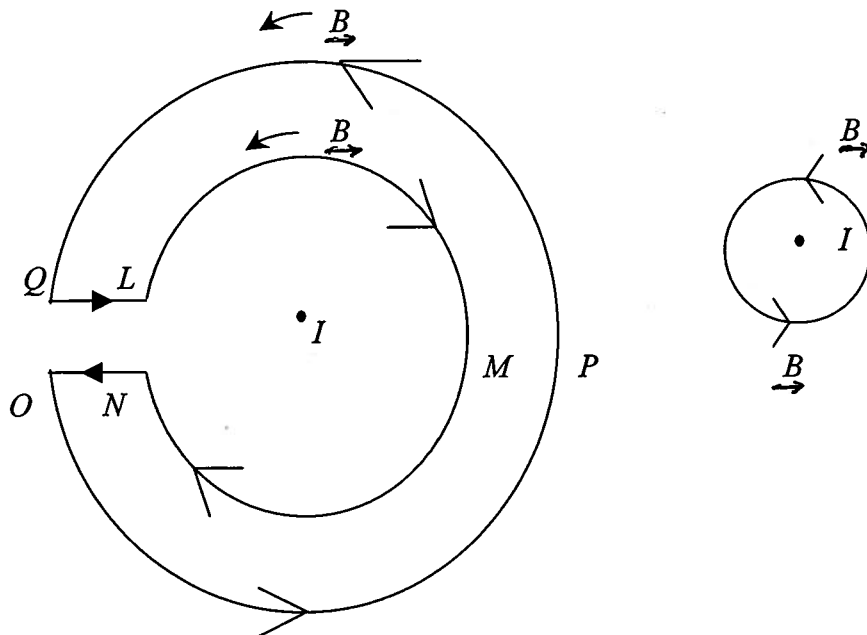

$$\vec{B}(r_1) = \frac{\mu_0 I}{2\pi r_1} \hat{\phi}$$


$$\vec{B}(r_2) = \frac{\mu_0 I}{2\pi r_2} \hat{\phi}$$

$$\begin{aligned} \sum_{c \rightarrow} \vec{B} \cdot \Delta \vec{l} &= \frac{\mu_0 I}{2\pi r_1} \cdot 2\pi r_1 + 0 + \frac{\mu_0 I}{2\pi r_2} \cdot 2\pi r_2 + 0 \\ &= L \rightarrow M \rightarrow N + N \rightarrow O + O \rightarrow P \rightarrow Q + Q \rightarrow L \\ &= 0 \end{aligned}$$


$\vec{B} \perp \Delta \vec{l}$

[The first term is -ive]  
 $\vec{B}$  and  $\Delta \vec{l}$  are opposite to one another


3.)




$\vec{J}$

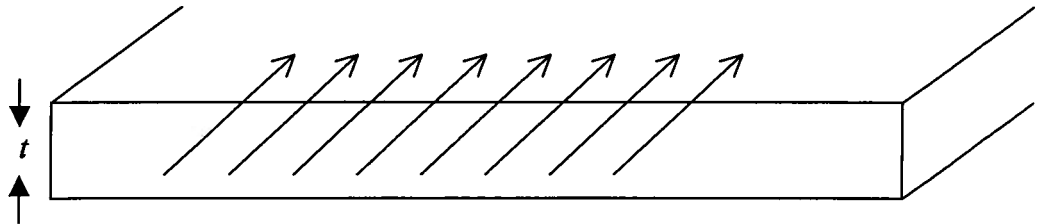

At  $y=0$  there is a Current sheet of thickness  $t$  carrying current density  $\vec{J} = -J\hat{z}$ . Looking <sup>at</sup> it end-on we see sources as

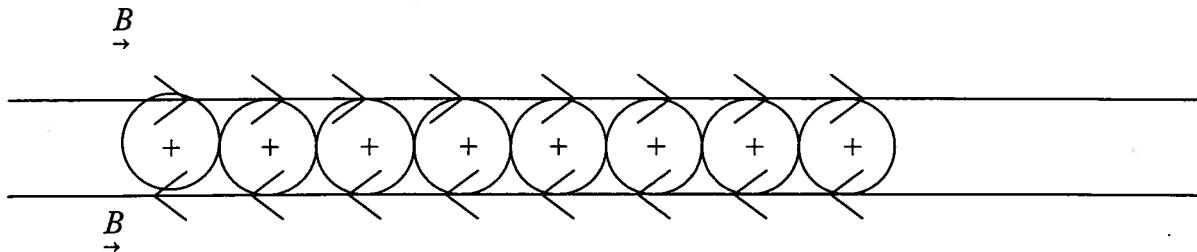

and we see that  $y$ -components of  $\vec{B}$  cancel out.  $\vec{B} \parallel \hat{x}$  survives. Let us take loop of width  $l$  and height  $h$ .

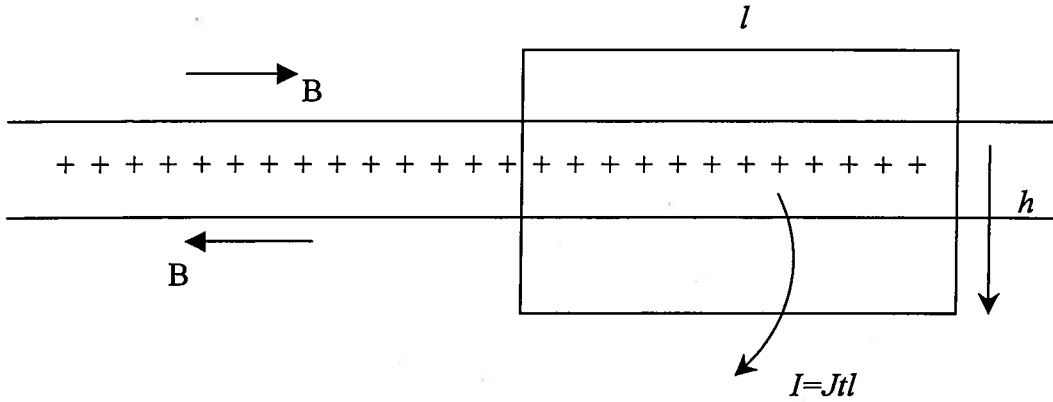


$$\begin{aligned} \sum_c \vec{B} \cdot \Delta \vec{l} &= Bl + 0 + Bl + 0 \\ &= 2Bl \\ &= \mu_0 Jt \end{aligned}$$

so,

$$\begin{aligned} B &= \frac{\mu_0 Jt}{2} \quad \& \quad \vec{B} = \frac{\mu_0 Jt}{2} \hat{x} \quad y > 0 \\ &= -\frac{\mu_0 Jt}{2} \hat{x} \quad y < 0 \end{aligned}$$

That is,  $\vec{B}$ -field will jump by  $\mu_0 Jt$  on crossing the current sheet from  $y < 0$  to  $y > 0$ .

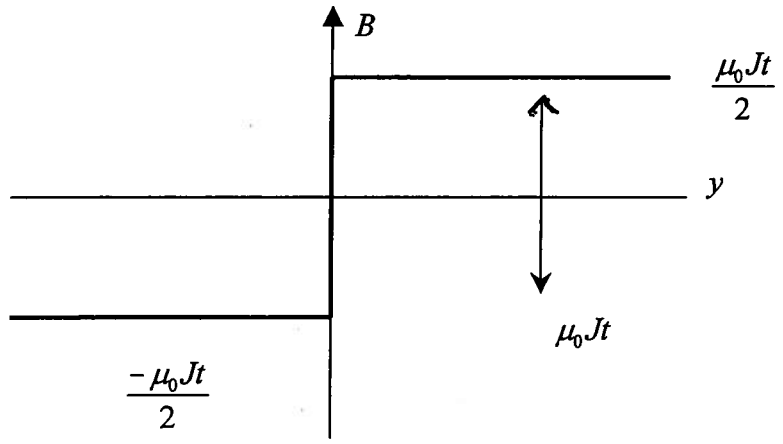



4.) Hollow Cylindrical Conductor- Radius  $R$ , carries uniform current. We want  $B$  at a distance  $r$  from its axis. Since there is a cylindrical symmetry we should use circles centered on the axis for our closed loop. For  $r < R$ . use loop 1.

$B \cdot 2\pi r = 0$ . No Current threads through loop 1.

for  $r > R$


so,  $B \cdot 2\pi r = \mu_0 I$ , the entire current threads loop 2.

$$\text{so, } B = \frac{\mu_0 I}{2\pi r} \hat{\phi}$$

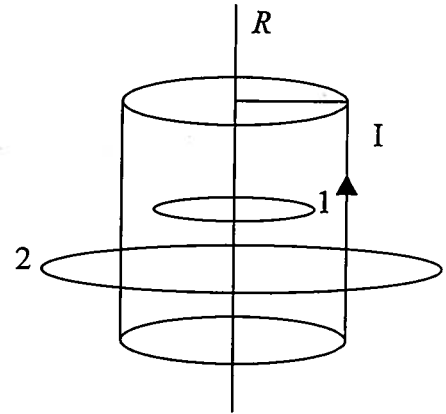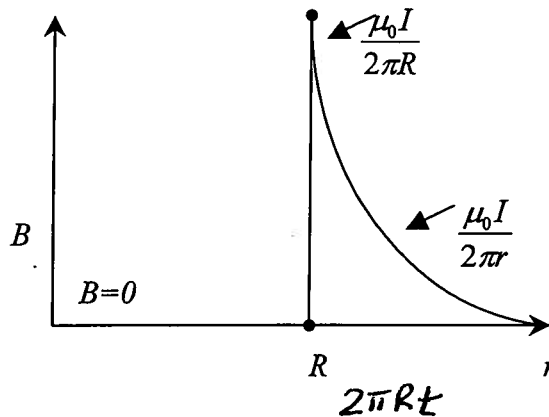


Note: if cylinder has wall thickness  $t$ :  $I = J \cdot 2\pi R t$  and field at surface would be  $\mu_0 J t$ . Again field would jump by  $\mu_0 J t$  on crossing a current sheet.

5.) SOLID CYLINDRICAL CONDUCTOR – with uniform current



$$\text{Define } J = \frac{I}{\pi R^2}$$


Now for  $r < R$   $I = J\pi r^2$



$$B \cdot 2\pi r = \mu_0 J \pi r^2$$

$$\vec{B} = \frac{\mu_0 J r}{2} \hat{\phi} \quad r < R$$


For  $r > R$ , entire  $I$  contributes  $B = \frac{\mu_0 I}{2\pi r} \hat{\phi}$

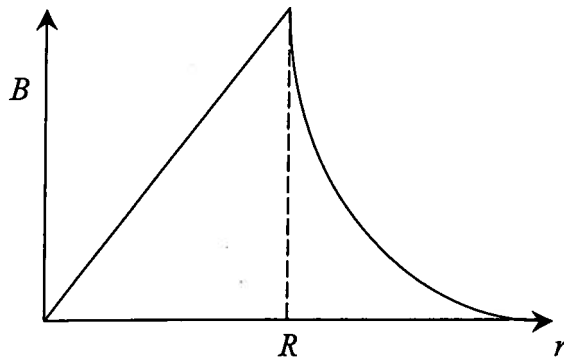

6.) Solenoid: Tightly wound, small radius, length much larger than radius:

$N$  turns,  $L$  long,  $n = \frac{N}{L}$  = # of turns per meter.

Look at two neighboring turns

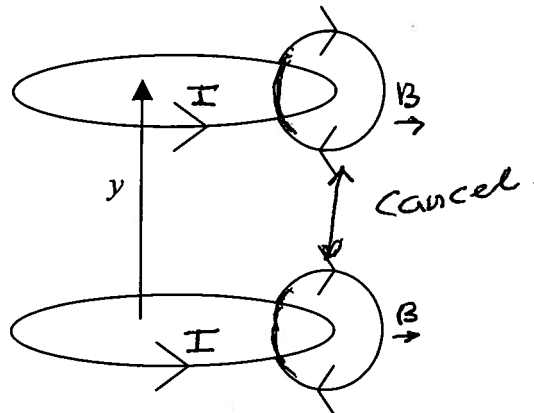

$r$ -component cancels  
 $B_y$  inside survives.

Long-narrow solenoid.  $B_y$  field lines must come out of top, loop around and enter at bottom with no breaks or bends allowed.

Take loop as shown  $B_l = \mu_0 n I l$   
 $B = \mu_0 n I$

For case shown  $B = \mu_0 n I \hat{y}$

